





## L 950 Hulsav for påboring på plast

\*Lang model

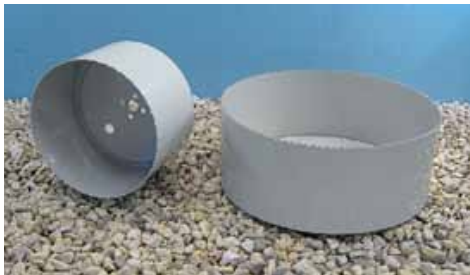


**Hulsav**  
**Montage, betjenings og veligeholdelsesvejledning**

VVS nummer	Rør mm Dimension	Borediameter A mm	Borets bredde B mm	Beskrivelse
192697.032	32	44	32	
192697.040	40	52	32	
192697.050	50	60	32	
192697.058	58	70	32	
192697.063	63	76	32	
192697.075	75	86	32	
192697.090	90	101	32	
192697.092	92	105	32	
192697.100	100	112	60*	
192697.111	110	121	90*	
192697.116	110	127	90*	
192697.110	110	138	90*	
192697.117	117	129	90*	
192697.128	128	142	90*	
192697.157	160	172	90*	
192697.159	160	174	90*	
192697.158	160	177	90*	
192697.160	160	186	90*	
192697.180	180	192	90*	
192697.199	200	212	90*	
192697.200	200	215	90*	
192697.202	200	217	90*	
192697.201	200	226	90*	
192697.233	233	248	90*	
192697.250	250	262	90*	
192697.251	250	265	90*	
		*Extra lang model		 
VVS nummer	Holder til Hulsav		Dimension for borepatron mm	
192697.800	Holder med centerbør		11	
192697.801	Holder med centerbør		13	
192997.810	Lang centerbør 6mm			

Andre dimensioner efter opgave

## Til tyndvæggede rør og brønde



VVS nummer	Udv. Rørdim. mm	Borehul Dim. mm	Borets Bredde B mm
192697.032	32	44	32
192697.032	40	44	32
192697.063	63	70	32
A	50	57	30
192697.161	75	90	30
	110	118	30
	125	134	30
	160	170	30

A: Boret leveres komplet.